

INTERNATIONAL STANDARD



**Industrial communication networks – Profiles –
Part 5-2: Installation of fieldbuses – Installation profiles for CPF 2**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 25.040.40; 35.100.40

ISBN 978-2-8322-5938-2

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

| | |
|--|----|
| FOREWORD..... | 10 |
| INTRODUCTION..... | 12 |
| 1 Scope..... | 13 |
| 2 Normative references | 13 |
| 3 Terms, definitions and abbreviated terms | 13 |
| 4 CPF 2: Overview of installation profiles | 13 |
| 5 Installation profile conventions | 14 |
| 6 Conformance to installation profiles..... | 15 |
| Annex A (normative) CP 2/1 (ControlNet™) specific installation profile | 16 |
| A.1 Installation profile scope..... | 16 |
| A.2 Normative references | 16 |
| A.3 Installation profile terms, definitions, and abbreviated terms..... | 16 |
| A.3.1 Terms and definitions..... | 16 |
| A.3.2 Abbreviated terms..... | 16 |
| A.3.3 Conventions for installation profiles | 16 |
| A.4 Installation planning | 17 |
| A.4.1 General..... | 17 |
| A.4.2 Planning requirements | 18 |
| A.4.3 Network capabilities..... | 19 |
| A.4.4 Selection and use of cabling components | 25 |
| A.4.5 Cabling planning documentation | 43 |
| A.4.6 Verification of cabling planning specification | 43 |
| A.5 Installation implementation | 43 |
| A.5.1 General requirements | 43 |
| A.5.2 Cable installation | 43 |
| A.5.3 Connector installation | 45 |
| A.5.4 Terminator installation | 54 |
| A.5.5 Device installation..... | 54 |
| A.5.6 Coding and labelling | 56 |
| A.5.7 Earthing and bonding of equipment and devices and shield cabling | 57 |
| A.5.8 As-implemented cabling documentation | 58 |
| A.6 Installation verification and installation acceptance test..... | 58 |
| A.6.1 General..... | 58 |
| A.6.2 Installation verification | 58 |
| A.6.3 Installation acceptance test..... | 61 |
| A.7 Installation administration..... | 63 |
| A.8 Installation maintenance and installation troubleshooting..... | 63 |
| A.8.1 General..... | 63 |
| A.8.2 Maintenance | 63 |
| A.8.3 Troubleshooting | 63 |
| A.8.4 Specific requirements for maintenance and troubleshooting..... | 68 |
| Annex B (normative) CP 2/2 (EtherNet/IP™) specific installation profile..... | 69 |
| B.1 Installation profile scope..... | 69 |

| | |
|--|-----|
| B.2 Normative references | 69 |
| B.3 Installation profile terms, definitions, and abbreviated terms | 69 |
| B.3.1 Terms and definitions..... | 69 |
| B.3.2 Abbreviated terms..... | 69 |
| B.3.3 Conventions for installation profiles | 70 |
| B.4 Installation planning | 70 |
| B.4.1 General..... | 70 |
| B.4.2 Planning requirements | 71 |
| B.4.3 Network capabilities..... | 71 |
| B.4.4 Selection and use of cabling components | 76 |
| B.4.5 Cabling planning documentation | 92 |
| B.4.6 Verification of cabling planning specification | 92 |
| B.5 Installation implementation | 92 |
| B.5.1 General requirements | 92 |
| B.5.2 Cable installation | 92 |
| B.5.3 Connector installation | 93 |
| B.5.4 Terminator installation | 94 |
| B.5.5 Device installation..... | 94 |
| B.5.6 Coding and labelling | 94 |
| B.5.7 Earthing and bonding of equipment and devices and shield cabling | 94 |
| B.5.8 As-implemented cabling documentation | 96 |
| B.6 Installation verification and installation acceptance test | 96 |
| B.6.1 General..... | 96 |
| B.6.2 Installation verification | 96 |
| B.6.3 Installation acceptance test..... | 98 |
| B.7 Installation administration..... | 99 |
| B.8 Installation maintenance and installation troubleshooting..... | 99 |
| Annex C (normative) CP 2/3 (DeviceNet™) specific installation profile..... | 100 |
| C.1 Installation profile scope..... | 100 |
| C.2 Normative references | 100 |
| C.3 Installation profile terms, definitions, and abbreviated terms | 100 |
| C.3.1 Terms and definitions..... | 100 |
| C.3.2 Abbreviated terms..... | 100 |
| C.3.3 Conventions for installation profiles | 100 |
| C.4 Installation planning | 101 |
| C.4.1 General..... | 101 |
| C.4.2 Planning requirements | 102 |
| C.4.3 Network capabilities..... | 103 |
| C.4.4 Selection and use of cabling components | 119 |
| C.4.5 Cabling planning documentation | 129 |
| C.4.6 Verification of cabling planning specification | 129 |
| C.5 Installation implementation | 129 |
| C.5.1 General requirements | 129 |
| C.5.2 Cable installation | 129 |
| C.5.3 Connector installation | 131 |

| | | |
|--------------|--|-----|
| C.5.4 | Terminator installation | 144 |
| C.5.5 | Device installation..... | 146 |
| C.5.6 | Coding and labelling | 150 |
| C.5.7 | Earthing and bonding of equipment and devices and shield cabling | 150 |
| C.5.8 | As-implemented cabling documentation | 151 |
| C.6 | Installation verification and installation acceptance test..... | 151 |
| C.6.1 | General..... | 151 |
| C.6.2 | Installation verification | 151 |
| C.6.3 | Installation acceptance test..... | 154 |
| C.7 | Installation administration..... | 155 |
| C.8 | Installation maintenance and installation troubleshooting..... | 155 |
| C.8.1 | General..... | 155 |
| C.8.2 | Maintenance | 155 |
| C.8.3 | Troubleshooting | 155 |
| C.8.4 | Specific requirements for maintenance and troubleshooting..... | 155 |
| Annex D | (informative) Additional information | 159 |
| D.1 | Network validation check sheet for CP 2/3 (DeviceNet) | 159 |
| Bibliography | | 163 |
| Figure 1 | – Standards relationships..... | 12 |
| Figure A.1 | – Interconnection of CPF 2 networks | 17 |
| Figure A.2 | – Overview of CPF 2/1 networks | 18 |
| Figure A.3 | – Drop cable requirements..... | 20 |
| Figure A.4 | – Placement of BNC/TNC plugs | 20 |
| Figure A.5 | – Placement of terminators | 21 |
| Figure A.6 | – Extending a network using repeaters | 21 |
| Figure A.7 | – Extending a network using active star topology..... | 21 |
| Figure A.8 | – Links..... | 22 |
| Figure A.9 | – Extending the network beyond 99 nodes | 22 |
| Figure A.10 | – Maximum allowable taps per segment..... | 31 |
| Figure A.11 | – Example of repeaters in star configuration | 32 |
| Figure A.12 | – Repeater in parallel..... | 33 |
| Figure A.13 | – Repeater in combination series and parallel..... | 34 |
| Figure A.14 | – Ring repeater..... | 34 |
| Figure A.15 | – Installing bulkheads | 35 |
| Figure A.16 | – Coaxial BNC and TNC terminators | 36 |
| Figure A.17 | – Terminator placement in a segment | 36 |
| Figure A.18 | – RC Shield Termination in Active Devices | 38 |
| Figure A.19 | – Redundant network icons..... | 39 |
| Figure A.20 | – Redundant coax media | 39 |
| Figure A.21 | – Redundant fibre media..... | 39 |
| Figure A.22 | – Repeater in series versus length difference for coax media | 40 |
| Figure A.23 | – Repeater in series versus length difference for fibre media | 41 |
| Figure A.24 | – Example of redundant coax network with repeaters..... | 41 |
| Figure A.25 | – Example of improper redundant node connection | 42 |

| | |
|--|----|
| Figure A.26 – Example tool kit for installing BNC connectors | 46 |
| Figure A.27 – Calibration of coaxial stripper..... | 46 |
| Figure A.28 – Coax PVC strip length detail (informative)..... | 47 |
| Figure A.29 – Memory cartridge and blade..... | 48 |
| Figure A.30 – Cable position..... | 48 |
| Figure A.31 – Locking the cable..... | 48 |
| Figure A.32 – Stripping the cable..... | 49 |
| Figure A.33 – Install the crimp ferrule | 49 |
| Figure A.34 – Cable preparation for PVC type cables (informative)..... | 50 |
| Figure A.35 – Cable preparation for FEP type cables (informative) | 50 |
| Figure A.36 – Strip guides | 50 |
| Figure A.37 – Using the flare tool..... | 51 |
| Figure A.38 – Expanding the shields..... | 51 |
| Figure A.39 – Install the centre pin | 51 |
| Figure A.40 – Crimping the centre pin..... | 52 |
| Figure A.41 – Installing the connector body | 52 |
| Figure A.42 – Installing the ferrule | 52 |
| Figure A.43 – Crimp tool | 53 |
| Figure A.44 – Sealed IP65/67 cable..... | 54 |
| Figure A.45 – Terminator placement | 54 |
| Figure A.46 – Mounting the taps | 55 |
| Figure A.47 – Mounting the tap assembly using the universal mounting bracket | 56 |
| Figure A.48 – Mounting the tap using tie wraps or screws..... | 56 |
| Figure A.49 – Redundant network icons..... | 57 |
| Figure A.50 – Network test tool..... | 59 |
| Figure A.51 – Shorting the cable to test for continuity | 60 |
| Figure A.52 – Testing fibre segments..... | 62 |
| Figure A.53 – Multi-fibre backbone cable housing..... | 64 |
| Figure A.54 – Repeater adapter module..... | 64 |
| Figure A.55 – Short and medium distance fibre module LEDs | 66 |
| Figure A.56 – Long and extra long repeater module LEDs | 67 |
| Figure B.1 – Interconnection of CPF 2 networks | 70 |
| Figure B.2 – Redundant linear bus..... | 72 |
| Figure B.3 – Peer-to-peer connections..... | 72 |
| Figure B.4 – Mated connections..... | 75 |
| Figure B.5 – The 8-way modular sealed jack & plug (plastic housing) | 82 |
| Figure B.6 – The 8-way modular sealed jack & plug (metal housing)..... | 82 |
| Figure B.7 – M12-4 connectors | 83 |
| Figure B.8 – Example of a metallic shell M12-8 X-coding connectors | 84 |
| Figure B.9 – Simplex LC connector..... | 85 |
| Figure B.10 – Duplex LC connector | 85 |
| Figure B.11 – IP65/67 sealed duplex LC connector..... | 85 |
| Figure B.12 – IP65/67 sealed duplex SC-RJ connector | 86 |

| | |
|--|-----|
| Figure B.13 – M12-4 to 8-way modular bulkhead | 88 |
| Figure B.14 – The 8-way modular sealed jack & plug (plastic housing) | 93 |
| Figure B.15 – The 8-way modular sealed jack & plug (metal housing) | 93 |
| Figure B.16 – M12-4 connectors | 94 |
| Figure B.17 – Earthing of cable shield | 96 |
| Figure C.1 – Interconnection of CPF 2 networks | 101 |
| Figure C.2 – Connection to generic cabling | 102 |
| Figure C.3 – DeviceNet cable system uses a trunk/drop line topology | 104 |
| Figure C.4 – Measuring the trunk length | 106 |
| Figure C.5 – Measuring the trunk and drop length | 106 |
| Figure C.6 – Measuring drop cable in a network with multiports | 107 |
| Figure C.7 – Removable device using open-style connectors | 107 |
| Figure C.8 – Fixed connection using open-style connector | 108 |
| Figure C.9 – Open-style connector pin out | 108 |
| Figure C.10 – Open-style connector pin out 10 position | 108 |
| Figure C.11 – Power Bus Current derate as a function of temperature differential | 111 |
| Figure C.12 – Power supply sizing example | 112 |
| Figure C.13 – Current limit for thick cable for one power supply | 113 |
| Figure C.14 – Example of a continuous power bus | 114 |
| Figure C.15 – Current limit for thick cable and two power supplies common V+ | 115 |
| Figure C.16 – Worst-case scenario | 116 |
| Figure C.17 – Example using the lookup method | 116 |
| Figure C.18 – One power supply end connected | 118 |
| Figure C.19 – Segmenting power in the power bus | 119 |
| Figure C.20 – Segmenting the power bus using power taps | 119 |
| Figure C.21 – Thick cable construction | 130 |
| Figure C.22 – Cable Type I construction | 130 |
| Figure C.23 – Thin cable construction | 131 |
| Figure C.24 – Flat cable construction | 131 |
| Figure C.25 – Cable preparation | 132 |
| Figure C.26 – Connector assembly | 132 |
| Figure C.28 – M12 connector pin assignment | 133 |
| Figure C.29 – Mini connector pin assignment | 133 |
| Figure C.30 – Preparation of cable end | 134 |
| Figure C.31 – Shrink wrap installation | 134 |
| Figure C.32 – Wire preparation | 134 |
| Figure C.33 – Open-style connector (female) | 135 |
| Figure C.34 – Open-style (male plug) | 135 |
| Figure C.35 – Flat cable | 136 |
| Figure C.36 – Aligning the cable | 136 |
| Figure C.37 – Closing the assembly | 137 |
| Figure C.38 – Proper orientation of cable | 137 |
| Figure C.39 – Locking the assembly | 137 |

| | |
|--|-----|
| Figure C.40 – Driving the IDC contacts in to the cable | 138 |
| Figure C.41 – End cap placement | 138 |
| Figure C.42 – End cap seated..... | 139 |
| Figure C.43 – End cap installation on alternate side of cable | 139 |
| Figure C.44 – Flat cable IDC connectors..... | 140 |
| Figure C.45 – Installing the connectors | 140 |
| Figure C.46 – Cable wiring to open-style terminals | 141 |
| Figure C.47 – Auxiliary power cable profile | 141 |
| Figure C.48 – Pin out auxiliary power connectors..... | 142 |
| Figure C.49 – Power supply cable length versus wire size | 143 |
| Figure C.50 – Sealed terminator | 145 |
| Figure C.51 – Open-style terminator | 145 |
| Figure C.52 – Open-style IDC terminator | 145 |
| Figure C.53 – Sealed terminator IDC cable | 146 |
| Figure C.54 – Direct connection to the trunk | 147 |
| Figure C.55 – Wiring of open-style connector..... | 147 |
| Figure C.56 – Wiring of open-style 10-position connector | 147 |
| Figure C.57 – Diagnostic temporary connections | 148 |
| Figure C.58 – Thick cable preterminated cables (cord sets) | 149 |
| Figure C.59 – Thin cable preterminated cables (cord sets)..... | 149 |
| | |
| Table A.1 – Basic network characteristics for balanced cabling not based on Ethernet | 23 |
| Table A.2 – Network characteristics for optical fibre cabling..... | 24 |
| Table A.3 – RG6 coaxial electrical properties..... | 26 |
| Table A.4 – RG6 coaxial physical parameters | 26 |
| Table A.5 – Cable type selection..... | 27 |
| Table A.6 – Information relevant to optical fibre cables | 28 |
| Table A.7 – Copper connectors for ControlNet | 29 |
| Table A.8 – Optical fibre connecting hardware | 29 |
| Table A.9 – Relationship between FOC and fibre types (CP 2/1)..... | 30 |
| Table A.10 – Parameters for coaxial RG6 cables | 44 |
| Table A.11 – Bend radius for coaxial cables outside conduit | 44 |
| Table A.12 – Parameters for silica optical fibre cables | 44 |
| Table A.13 – Parameters for hard clad silica optical fibre..... | 45 |
| Table A.14 – Test matrix for BNC/TNC connectors..... | 60 |
| Table A.15 – Wavelength and fibre types | 63 |
| Table A.16 – LED status table..... | 65 |
| Table A.17 – Repeater adapter and module diagnostic | 65 |
| Table A.18 – Repeater adapter indicator diagnostic | 65 |
| Table A.19 – Repeater module indicator | 66 |
| Table A.20 – Short and medium distance troubleshooting chart | 67 |
| Table A.21 – Long and extra long troubleshooting chart..... | 68 |
| Table B.1 – Network characteristics for balanced cabling based on Ethernet | 73 |

| | |
|--|-----|
| Table B.2 – Network characteristics for optical fibre cabling..... | 74 |
| Table B.3 – Fibre lengths for 1 mm POF A4a.2 POF 0.5 NA | 74 |
| Table B.4 – Fibre lengths for 1 mm POF A4d POF 0.3 NA | 75 |
| Table B.5 – Recognized fibre types..... | 76 |
| Table B.6 – Recognized fibre PMDs..... | 76 |
| Table B.7 – Information relevant to copper cable: fixed cables 10/100 MHz | 77 |
| Table B.8 – Information relevant to copper cable: fixed cables 1 000 MHz | 77 |
| Table B.9 – Information relevant to copper cable: cords 10/100 MHz | 78 |
| Table B.10 – TCL limits for unshielded twisted-pair cabling serving 10/100 Mb/s | 79 |
| Table B.11 – TCL limits for unshielded twisted-pair cabling serving 1 000 Mb/s | 79 |
| Table B.12 – ELTCTL limits for unshielded twisted-pair cabling serving 10/100 Mb/s | 79 |
| Table B.13 – ELTCTL limits for unshielded twisted-pair cabling serving 1 000 Mb/s | 79 |
| Table B.14 – Coupling attenuation limits for screened twisted-pair cabling..... | 80 |
| Table B.15 – Information relevant to optical fibre cables | 80 |
| Table B.16 – Connectors for balanced cabling CPs based on Ethernet | 81 |
| Table B.17 – TCL limits for connectors based on Ethernet serving 1 000 Mb/s..... | 81 |
| Table B.18 – Industrial EtherNet/IP 8-way modular connector parameters | 82 |
| Table B.19 – Industrial EtherNet/IP M12-4 D-coding connector parameters | 82 |
| Table B.20 – Industrial EtherNet/IP M12-8 X-coding connector parameters..... | 83 |
| Table B.21 – Optical fibre connecting hardware | 84 |
| Table B.22 – Relationship between FOC and fibre types (CP2/2)..... | 86 |
| Table B.23 – Connector insertion loss..... | 86 |
| Table B.24 – Parameters for balanced cables | 92 |
| Table B.25 – Parameters for silica optical fibre cables | 92 |
| Table B.26 – Parameters for POF optical fibre cables | 93 |
| Table C.1 – Basic network characteristics for copper cabling not based on Ethernet..... | 104 |
| Table C.2 – Cable trunk and drop lengths for CP 2/3 | 105 |
| Table C.3 – Summary of available current for trunk cables (CP 2/3)..... | 109 |
| Table C.4 – Permissible current for thin cable drop lines of various lengths | 110 |
| Table C.5 – Power supply specification for DeviceNet..... | 110 |
| Table C.6 – Power supply tolerance stack up for DeviceNet..... | 111 |
| Table C.7 – Current versus cable length for one power supply thick cable | 114 |
| Table C.8 – Current versus length for two power supplies..... | 115 |
| Table C.9 – Definition of equation variables | 117 |
| Table C.10 – Information relevant to copper cable: fixed cables..... | 120 |
| Table C.11 – Information relevant to copper cable: cords..... | 120 |
| Table C.12 – DeviceNet cables and connector support cross reference | 121 |
| Table C.13 – DeviceNet cable profiles | 122 |
| Table C.14 – Copper connectors for non-Ethernet based fieldbus | 124 |
| Table C.15 – Additional connectors for CP 2/3 (DeviceNet) | 124 |
| Table C.16 – Parameters for balanced cables..... | 129 |
| Table C.17 – Wire colour code and function..... | 135 |
| Table C.18 – Auxiliary power cable colour code | 141 |

| | |
|--|-----|
| Table C.19 – Auxiliary power supply requirements | 142 |
| Table C.20 – Signal wire verification | 152 |
| Table C.21 – Shield to earth | 152 |
| Table C.22 – Connector pin out | 154 |

INTERNATIONAL ELECTROTECHNICAL COMMISSION

INDUSTRIAL COMMUNICATION NETWORKS – PROFILES –

Part 5-2: Installation of fieldbuses – Installation profiles for CPF 2

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 61784-5-2 has been prepared by subcommittee 65C: Industrial networks, of IEC technical committee 65: Industrial-process measurement, control and automation.

This fourth edition cancels and replaces the third edition published in 2013. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) references to ISO/IEC 24702 have been replaced with references to ISO/IEC 11801-3 in Table B.1;
- b) errors have been corrected;
- c) Tables B11 and B13 have been added in support of 1,000 Mb/s 4 Pair Ethernet;

d) Clarification of dual power supplies for Annex C.

This standard is to be used in conjunction with IEC 61918:2018.

The text of this International Standard is based on the following documents:

| | |
|--------------|------------------|
| FDIS | Report on voting |
| 65C/924/FDIS | 65C/925/RVD |

Full information on the voting for the approval of this International Standard can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts of IEC 61784-5 series, under the general title *Industrial communication networks – Profiles – Installation of fieldbuses*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

This International Standard is one of a series produced to facilitate the use of communication networks in industrial control systems.

IEC 61918:2018 provides the common requirements for the installation of communication networks in industrial control systems. This installation profile standard provides the installation profiles of the communication profiles (CP) of a specific communication profile family (CPF) by stating which requirements of IEC 61918 fully apply and, where necessary, by supplementing, modifying, or replacing the other requirements (see Figure 1).

For general background on fieldbuses, their profiles, and relationship between the installation profiles specified in this document, see IEC 61158-1.

Each CP installation profile is specified in a separate annex of this document. Each annex is structured exactly as the reference standard IEC 61918 for the benefit of the persons representing the roles in the fieldbus installation process as defined in IEC 61918 (planner, installer, verification personnel, validation personnel, maintenance personnel, administration personnel). By reading the installation profile in conjunction with IEC 61918, these persons immediately know which requirements are common for the installation of all CPs and which are modified or replaced. The conventions used to draft this document are defined in Clause 5.

The provision of the installation profiles in one standard for each CPF (for example IEC 61784-5-2 for CPF 2) allows readers to work with standards of a convenient size.

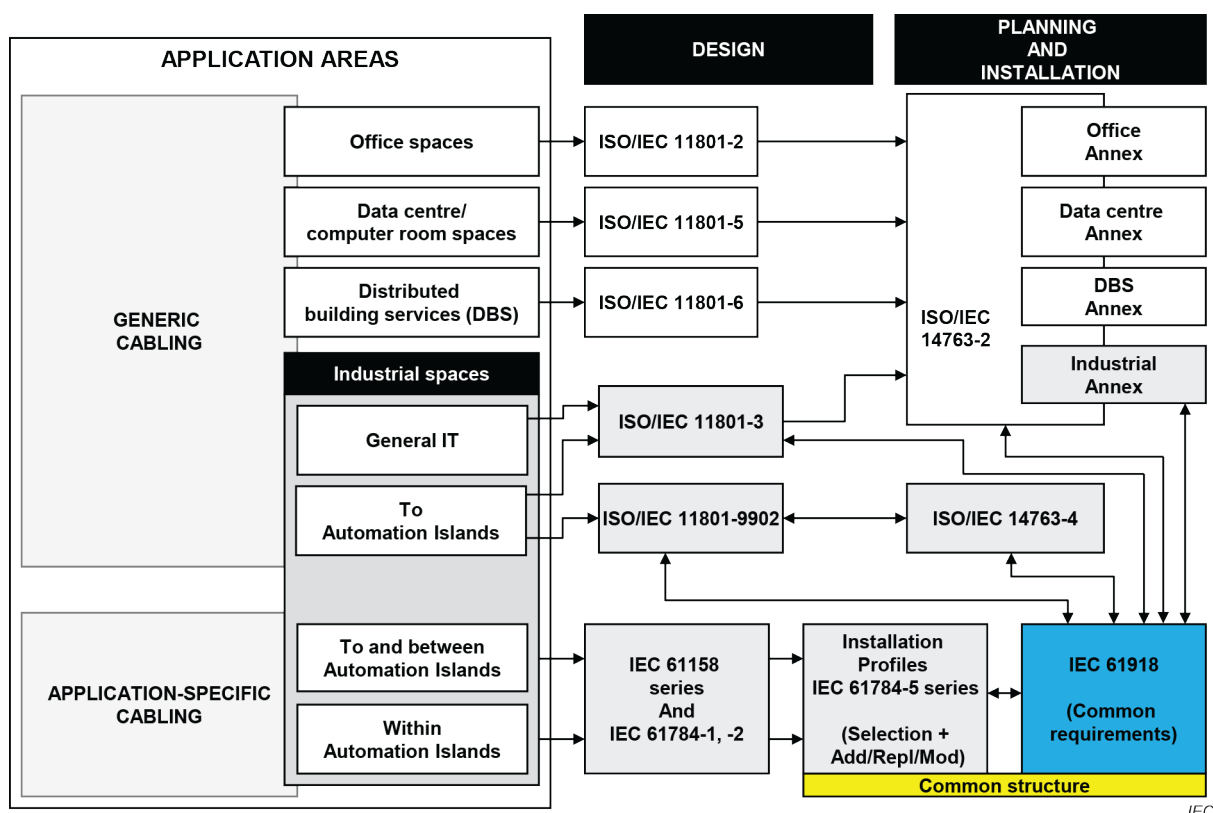


Figure 1 – Standards relationships

INDUSTRIAL COMMUNICATION NETWORKS – PROFILES –

Part 5-2: Installation of fieldbuses – Installation profiles for CPF 2

1 Scope

This part of IEC 61784-5 specifies the installation profiles for CPF 2 (CIP™¹).

The installation profiles are specified in the annexes. These annexes are read in conjunction with IEC 61918:2018.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61918:2018, *Industrial communication networks – Installation of communication networks in industrial premises*

The normative references of IEC 61918:2018, Clause 2, apply.

NOTE For profile specific normative references, see Clauses A.2, B.2, and C.2.

¹ CIP™ (Common Industrial Protocol) is a trade name of ODVA, Inc. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by IEC of the trademark holder or any of its products. Compliance to this document does not require use of the trade name CIP™. Use of the trade name CIP™ requires permission of ODVA, Inc.